



Get in touch with MicroTouch.




SLIMLINE KIOSK SERIES

MODEL NUMBER

SK-190P-A1

19" PCAP
HDMI/DP/VGA
IP65 Rated
Embedded or Stand Alone



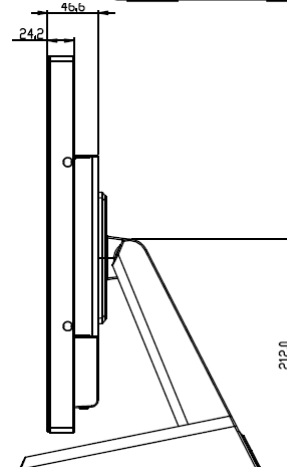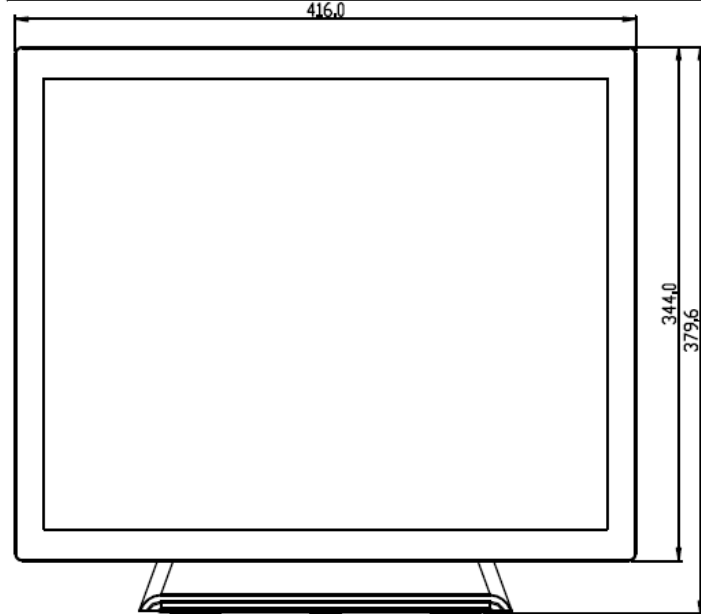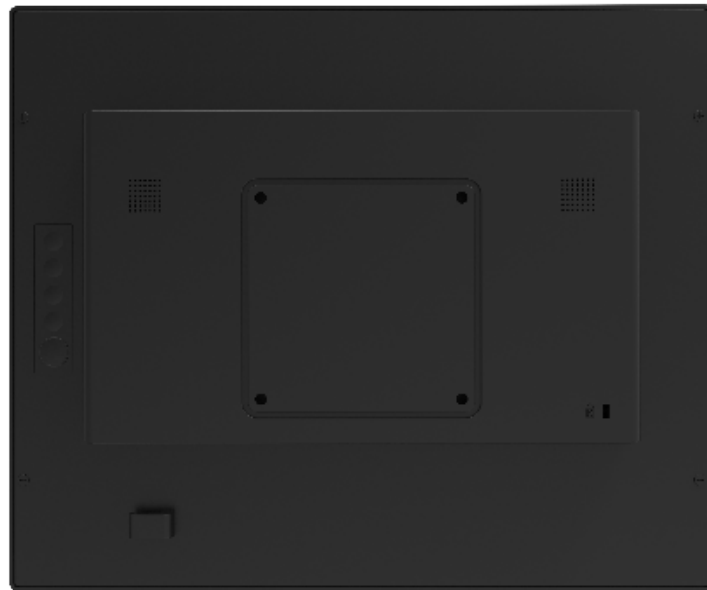

SPECIFICATIONS

Size	19" TFT LCD
Maximum Resolution	1280 x 1024
Aspect Ratio	5:4
Contrast Ratio	1000:1
Brightness	250 nits (No Touch), 225 nits (P-CAP)
View Angle	H:170°, V:160°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
I/O Ports	
Serial Port	1 x RJ11 Remote OSD
USB Port	1 x USB 2.0 (Type B) for Touch Interface
Video Port	1 x VGA (DB15), 1 x HDMI, 1x DP
Audio Port	-
Power Input	1 x 2.1 mm 12V DC Jack
Physical Properties	
Power Supply	60W (12V, 5A) External Power Adaptor
Speaker	-
Housing Color	Black
Construction	Glass, SECC Metal, Plastic (ABS)
Compliance	Front Panel IP65 Compliant, Rear IPX1
Dimensions (W x H x D) mm	416 x 344 x 46.6 mm
Net Weight (kg)	4.4 kg
Gross Weight (kg)	6.3 kg
Carton (W x H x D) mm	500 x 425 x 133 mm
VESA	100 x 100 mm
Ball Drop	-
Safety	
Certifications	CE/FCC/UL(62368)/CB (62368)/CCC
Environment	
Operating Temperature	0° C ~ 40° C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20° C ~ 60° C, 10% ~ 90% RH. Non-Condensing
Optional Peripheral	
Industrial Stand	IS-000-A1 (Sold Separately)
Remote OSD	Rem45-A1 (Sold Separately)

The information presented in this specification sheet is intended as general information about MicroTouch™ products and is subject to change. Product specifications and warranties will be governed by MicroTouch™ standard terms and conditions of sale. Products are subject to availability.
 MicroTouch™ Copyright © 2020 MicroTouch™ All rights reserved.

